

632.8nm (RED) HELIUM NEON LASER

MODEL: 05-LHB-294

OUTPUT SPECIFICATIONS

Minimum CW Power Output (W):*	See Note
Wavelength (nm)	632.8
Transverse Mode	N/A
Polarization	Linear > 500:1
Beam Diameter at 1/e ² Points	N/A
Beam Divergence (mrad)	N/A
Longitudinal Mode Spacing (MHz)	N/A
Mode Sweeping	N/A
Long Term Power Drift (8 hrs)	N/A
Amplitude Noise, 30 Hz to 30 MHz (peak-to-peak)	N/A
Warmup to > 95% of Maximum Power (minutes)	N/A
Beam Position Drift From Cold Start (mrad)	N/A
Beam Position Drift After 15 Minute Warmup (mrad)	N/A


ELECTRICAL SPECIFICATIONS

Start Voltage (kVdc)	< 8		
Recommended Operating Current (mA)	4.0 ± 0.2		
Operating Voltage with 68k Ohm Ballast (VDC)	1350 ± 100		
Recommended Power Supply	Laboratory	OEM (AC)	OEM (DC)
	05-LPL-900-040	05-LPM-900-040	05-LPM-800-040

ENVIRONMENTAL SPECIFICATIONS

	OPERATING	NON-OPERATING
Temperature (°C)	-20 to +60	-40 to +80
Altitude (meters)	0 to 3000	0 to ∞
Relative Humidity (% , non-condensing)	0 to 99%	0 to 99%
Mechanical Shock (g)	< 1 for < 11 msec	< 25 for < 11 msec < 100 for < 1 msec

*Note: 1.0mW with flat H.R. mirror (L01003-1) and 45cm O.C. mirror (L01002-1) spaced 340mm apart.

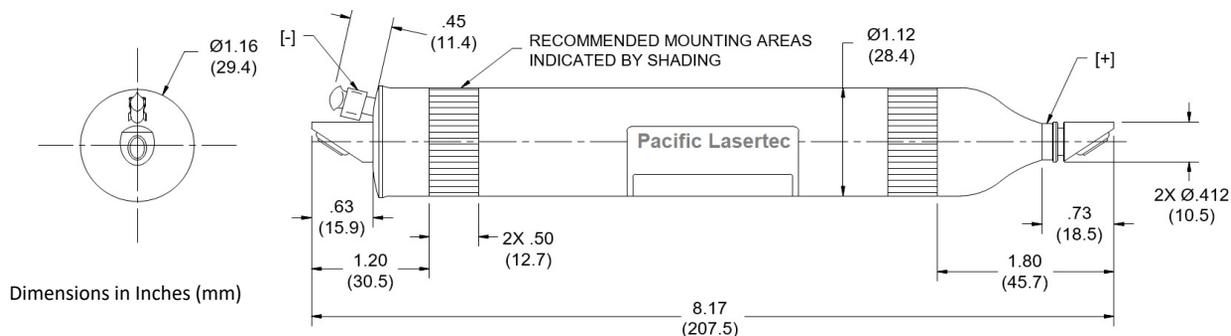

632.8nm (RED) HELIUM NEON LASER MODEL: 05-LHB-294

LASER CLASSIFICATION		
US 21 CFR 1040.10	Non-Compliant [See Conditions of Acceptability Below]	Class IIIa
IEC 60825-1:2014	Non-Compliant [See Conditions of Acceptability Below]	Class 3R
US FDA Accession Number		8010237
REGULATORY COMPLIANCE		
RoHS 3		EU 2015/863
Product Markings		CE, WEEE
EXPORT INFORMATION	LASER	POWER SUPPLY*
ECCN	EAR99	EAR99
HTTS	9013.20.0000	8504.40.9510
Country of Origin	United States	Contact Factory
<i>THESE PRODUCTS ARE SOLD IN ACCORDANCE WITH UNITED STATES EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAWS IS PROHIBITED.</i>		

* Power Supply is Sold Separately

CONDITIONS OF ACCEPTABILITY :
1. For component type devices, the following requirements shall be followed at end use.
2. The laser power supply at end use shall have negative output terminal reliably connected to earth. The maximum output current of the power supply shall not exceed 2.5A under normal and fault conditions.
3. Safety interlock switch, key switch, controls, laser housing and laser beam attenuator, as appropriate for each laser Class, must be present in accordance with Laser safety standards, IEC/EN 60825-1:2014.
4. A visual or audio indicator, in accordance to Laser safety standards, shall be provided in the end product.
5. The unit's thermal circuitry shall be evaluated in the end product.
6. The end user must provide their own safety monitoring mechanism to shut down a power supply if it fails to start the laser after several seconds.
7. IEC/EN 60825-12 shall be considered if the end system is a free space optical communication system used for transmission of information.

Information contained herein is for reference only and subject to change without notice.